

Recreation Supply Company

P.O. Box 2757 Bismarck, ND 58502-2757

Please fax completed forms to:

800-850-0262

or

701-255-7895

**If you need assistance filling out the forms please call us at
800-437-8072 or 701-222-4860.**

RecordQuest™ Long Reach Starting Platform ORDER FORM

This form is to be used when ordering the **QuikBlox RecordQuest Long Reach** starting platforms. Help us serve your clients better by supplying us along with this form, architectural line drawings and specifications for new installations, and line drawings and/or photos for existing applications. Please **Fax** to (503) 266-4334. Thank-you. SR Smith, PO Box 400, 1017 SW Berg Parkway, Canby, OR 97013 (888) 677-7776

I. DATE: _____

Company: _____

Name: _____

Address: _____

Phone: _____ Email: _____

II. PROJECT OR JOB INFORMATION:

Institution: _____

Contact Name: _____

Address: _____

City: _____ State: _____ ZIP: _____

Phone: _____ Email: _____

III. STARTING PLATFORM ORDERED (see Specification #SRS-308 for model numbers):

QuikBlox RecordQuest Long Reach Model: # _____

IV. DEPTH OF WATER AT STARTING LOCATION:

_____ Feet _____ Inches.

This measurement is to be made at a distance from the pool wall that is specified by applicable ruling bodies. The National Federation of State High School Associations (NFSHA) prohibits starting blocks in pools with depths of less than 4 feet in the starting end. SR Smith recommends that starting platforms be installed at the deep end of the pool wherever possible.

V. STARTING PLATFORM HEIGHT and SETBACK:

Height from deck to front of platform:
(Measurement "A") _____


Height from deck to water level:
(Measurement "E") _____

Height of platform above water level:
(Measurements "A" plus "E") _____
(Maximum of 30" including thickness
of a Relay Judging Platform, if used)

Note: FINA regulations require 29.50" maximum

Required setback (Distance from pool wall to center of stanchion):
(Measurement "F") _____

Note: Setbacks available, range from 30"- 40", in two-inch increments.

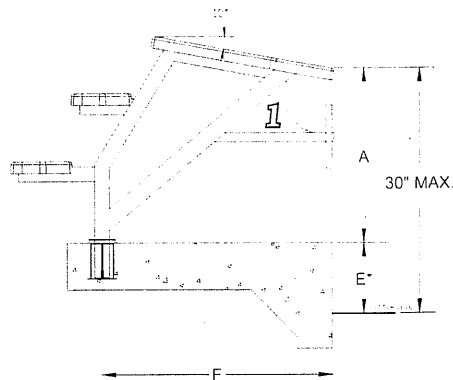


Starting Block
Order Forms

VI. **GUTTER CONFIGURATION:** (Check the diagram which is closest.)

Fully Recessed Gutter



Fully Recessed Gutter w/ Parapet




Partially Recessed Gutter




Rollout Gutter



Flush Gutter & Deck



Flush Gutter with Bull-nose



VII. **ANCHORING INFORMATION:**

A. Parapet dimensions (if applicable):

Width: _____ inches from pool wall to back of parapet (Dimension "G")

Height: _____ inches from deck to top of parapet (Dimension "H")

B. Gutter dimensions:

Width from pool wall to front edge of deck: _____ Inches
 (Dimension "J" for Partially Recessed or Rollout Gutters)

Height from water level to deck: _____ Inches
 (Dimension "E" for all decks)

C. Existing anchors (starting blocks supplied with one anchor):

Are there existing anchor stanchions in deck or bulkhead? If so, please call customer service.

VIII. **Quikblox SPECIAL OPTIONS:**

A. Start Strobes, Cable, and Interface Requirements:

Single strobe – front of platform (additional charge)

Dual strobe – front and rear of platform (additional charge)

10' low voltage cables with banana plugs connecting each starting block together.

30' low voltage cables with banana plugs for connecting to a starters console.

Interface device to fire strobes with any type of starters console.

B. Colors (additional charge for custom colors):

Standard color: **Blue**

Custom Powder-Coat (please indicate color): _____

Additional Comments:

Starting Block
Order Forms