


12" SQUARE MOFLOW® SUCTION OUTLET COVER AND MUD FRAME



**VGBA CERTIFIED
SPECIFICATIONS**

Open Area
71.2 in²

For SOFA Specific Flow Ratings and
specifications please scan QR code or visit
www.aquastarpoolproducts.com/flowcode



FEATURES

Certified, Listed, and Labeled in
conformance with APSP/ANSI/ICC-16 2017
and NSF/ANSI/CAN 50 standards

Easily and safely retrofits to 12" square
¾" deep frames

#316 stainless steel screws

Manufactured from superior UV-resistant
engineered polymers

Trademarked VGBA compliance button
easily identifies VGBA 2017 compliant cover
from on deck and underwater

Online product support including
specifications, General Certificate of
Conformity, installation instructions, and
more

Replace drain cover every five years from
the date of installation

See next page for additional product
configurations

6 per case





Part # 12MFxxx

Designed to replace standard 12" square covers
that have a 11¼" center-to-center screw hole
measurement with ¾" deep existing frames.

AVAILABLE COLORS

- ☐ 12MF101 – White
- ☒ 12MF102 – Black
- ☐ 12MF103 – Light Gray
- ☐ 12MF105 – Dark Gray

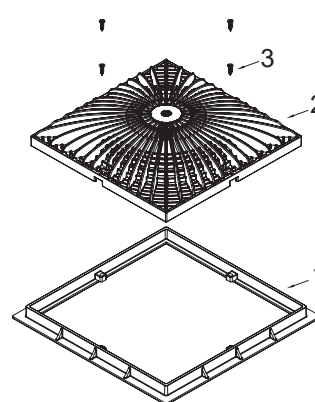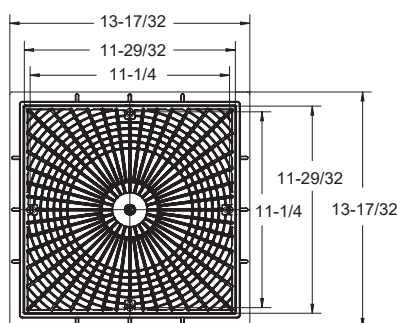

1. 12" Square Mud Frame
2. 12" Square MoFlow Suction Outlet Cover
3. 10 x .75" Flat Head Phillips Screw, 316 SS, Qty 4

VGBA 2017 Compliant

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com CS005-070726



6" Socket Deep PVC Sump

NSF



Certified to
NSF/ANSI/CAN 50
ANSI/APSP/ICC-16 2017

Open Area
71.2 in²

For SOFA specific flow ratings and
specifications, please scan QR code or visit
www.aquastarpoolproducts.com/flowcode



Part #
12MFxxxF
1 per case

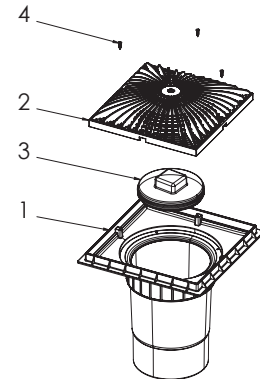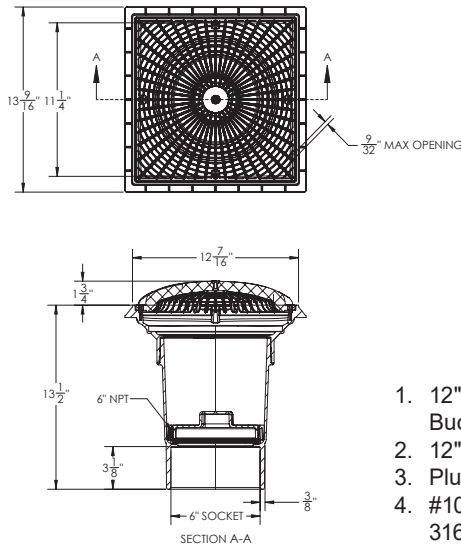

1. 12" Round Double Deep PVC Sump Bucket with 6" Socket
2. 12" Square MoFlow Suction Outlet Cover
3. Plug, 6" NPT
4. #10 x .75" Flat Head Phillips Screw, 316 SS, Qty 4


3" Socket x 4" Spigot Side Port PVC Sump

NSF

Certified to
NSF/ANSI/CAN 50
ANSI/APSP/ICC-16 2017

Open Area
71.2 in²

For SOFA specific flow ratings and
specifications, please scan QR code or visit
www.aquastarpoolproducts.com/flowcode





Hassle-free pressure testing
and winterizing



Part #
12MFxxxSSB
1 per case

Hassle-free pressure testing and winterizing
Comes with a 3" and 2" NPT cap with O-ring.
No knock-outs required.
2" Plug and O-Ring, p/n xxx
3" Plug and O-Ring, p/n xxx

Optional 2" hydrostatic relief valve available p/n HVK101

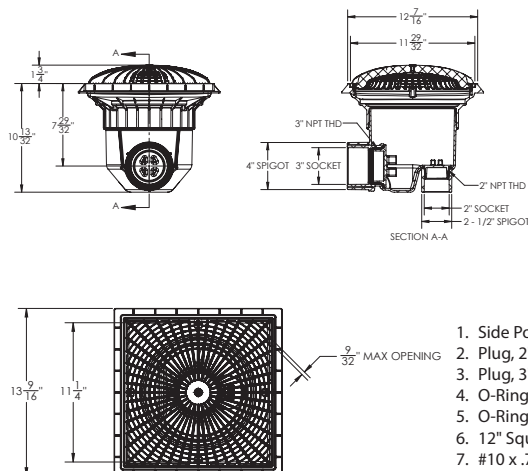

1. Side Port Sump Bucket, 12" Square Frame
2. Plug, 2" Pipe THD.
3. Plug, 3" Pipe THD.
4. O-Ring, #340, 3.35" ID x .21" THK., EPDM
5. O-Ring, #228, 2.25" ID x .125" THK., EPDM
6. 12" Square MoFlow Suction Outlet Cover
7. #10 x .75" Flat Head Phillips Screw, 316 SS, Qty 4