

FLOWSTAR® STANDARD SKIMMER WITH FLUSH FACE, FLOAT ASSEMBLY, BASKET, LID AND ADJUSTABLE COLLAR



Built in conformance with NSF 50 and SPS 3 standards

FEATURES

Designed for commercial and residential use,
15 GPM min, 90 GPM max

Adjustable collar

New weir clip lock secures the clips in the weir door

Large self-contained basket with lock-in feature
(will not float)

Underwater dampers on the faceplate for noise
reduction on weir plate – especially on windy days

Super strong engineered polymer upper housing

Extra heavy duty PVC lower unit
(no transitional glue required)

2½" outside slip and 2" inside slip (outside skimmer)

2" threads for pressure testing
(inside skimmer)

Built-in overflow or fill line knock out

Upper housing has pre-cut rebar cutouts with
pre-drilled holes for tie wire

Skimmer Lid and Collar G154 UV tested

Optional custom name/logo engraved on the lid
(requires minimum 500 piece lid order)

1 per case

Two additional lid options available (sold separately):
square or snap-in round/square



Optional BFB adapter converts
skimmer fittings to 4" or 3" tee
for improved hydraulics and code
compliance p/n BFB101

Part # SKR2xx

STANDARD COLORS

- SKR201 – White
- SKR203 – Light Gray
- SKR205 – Dark Gray


Snap-in Round/Square Lid and Collar
(sold separately) p/n SK65xxx, 8 per case

Square Lid and Collar (sold separately)
p/n SK64xxx, 6 per case

Available without lid and collar
SKR2NL101 (white only), 1 per case

NOTICE: For NSF certified skimmers, please
contact your AquaStar Sales Representative.
Lid, float valve, 4" socket, and 6" socket
options are not NSF certified.

SPS 3 & NSF 50 Compliant

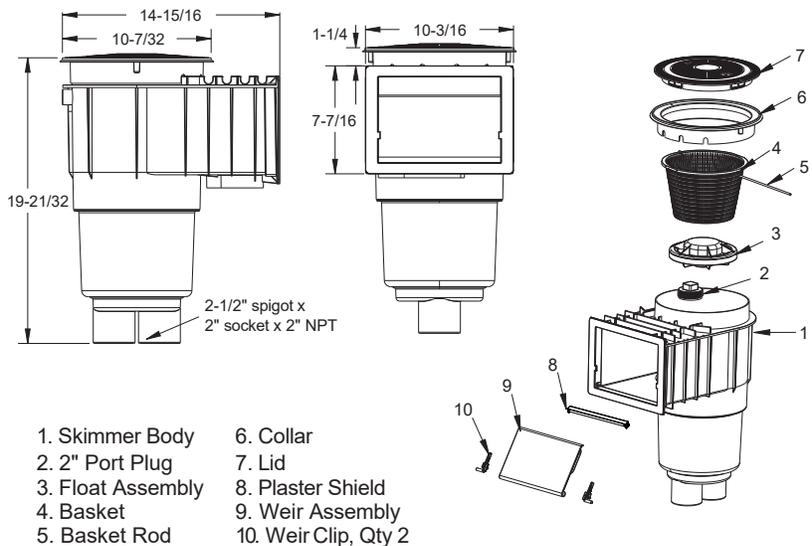

ADDITIONAL PRODUCT CONFIGURATIONS FOR SKR2XX

9" Ultra Basket

Designed for commercial and residential use, 15 GPM min, 90 GPM max

Available 2" Socket Dual-Port, 4" Socket, 6" Socket, and Water Bonded

Example: SKR201D-L= White FlowStar® Skimmer with 4" Socket Sump and 9" Ultra Basket


1 per case

STANDARD COLORS

- SKR201-L – White
- SKR203-L – Light Gray
- SKR205-L – Dark Gray



Part # SKR2xx-L

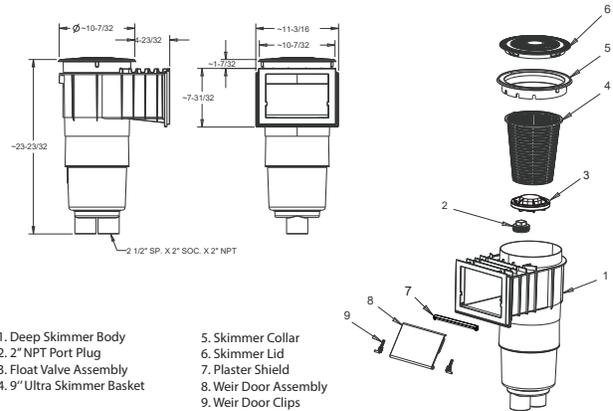

Water Bonded

Designed for commercial and residential use, 15 GPM min, 90 GPM max

Bonding plate and copper wire connection meet NEC section 680.2 C.

Conforms to UL 1081, UL 1563, CAN/CSA-C22.2

Bonding plate is safely placed behind the skimmer basket, for constant water contact, even when the pump is off

1 per case

STANDARD COLORS


- 101
- 103
- 105



Standard Part # SKR17xxx

Also available without lid Part # SKR17NLxxx

9" Ultra Basket Part # SKR17xxx-L

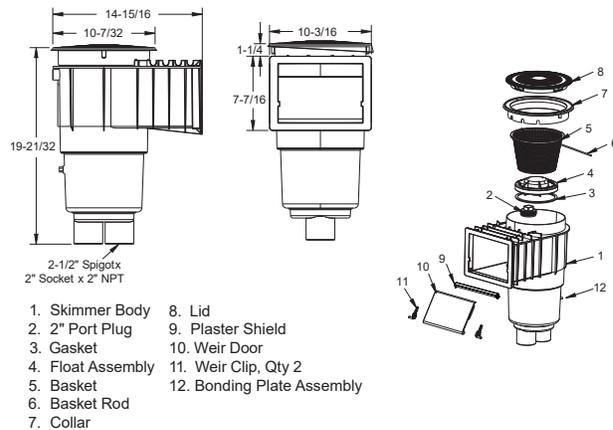

ADDITIONAL PORT CONFIGURATIONS FOR SKR2XX AND SKR2XX-L

4" Socket Sump

Extra heavy duty PVC lower unit (no transitional glue required)

Standard Part # SKR2xxD

9" Ultra Basket Part # SKR2xxD-L

1 per case



6" Socket Sump

Extra heavy duty PVC lower unit (no transitional glue required)

Standard Part # SKR2xxF

9" Ultra Basket Part # SKR2xxF-L

1 per case

