

Flexipath Covid-19




Lightweight, slip-resistant delineated walkway and safety stand zone matting for visitors, customers and employees



Implement social distancing measures quickly and easily with Flexipath Covid-19, a single-tier, lightweight walkway mat with delineated stand zones in alternating color blocks.

As Covid-19 lockdown restrictions begin to ease, many businesses face the challenge of continuing or restarting operations while complying with social distancing measures. Our Flexipath Covid-19 matting has delineated stand zones that allow customers, visitors and employees to easily observe social distancing rules.

The mat's alternating color blocks makes it ideal for businesses with queuing customers or workplaces with standing employees. The lightweight construction means the mat is quick to install and easy to move if needed.



Features:



Etched surface



Open-grid construction



Resistant to most acids, alkali and oils



Single tier, lightweight construction



Comes in rolls of up to 80' (24m)




Benefits:



Certified slip resistant (ASTM I677: 1.0/0.8)



Excellent drainage (DIN 51130:V10)



Easy to clean



Contours to uneven surfaces and comfortable to stand on



Quick to install and move if needed



Plastex Matting Inc.

120 55th St NE
Fort Payne, AL 35967
+1 256 845 7725

USA + UK manufactured
matting products:
plastexmatting.com

Flexipath Covid-19


Data sheet




Standard sizes:

Product	Flexipath Covid-19
Height	1/4" (6mm)
Standard roll options	80' x 18" (24 x 0.45m)
	80' x 2' (24 x 0.6m)
	80' x 3' (24 x 0.91m)
Weight	0.76 lb/sq.ft (3.70 kg/m2)


Standard colors:




Black



Blue



More colors
available
upon request

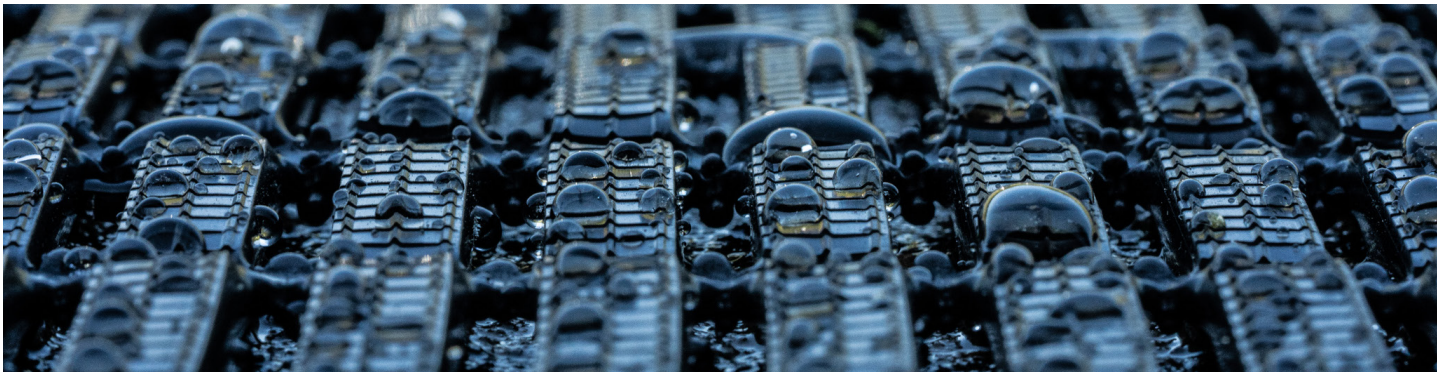

Flexipath Covid-19

Data sheet



Installation:

Flexipath's one-piece construction means installation is simple:

- Comes in rolls of up to 80'
- Place where needed and unroll
- No special tools or previous site visits needed
- Contours to uneven surfaces

Cleaning:

Flexipath's lightweight, open-grid construction makes it easy to clean:

- Simply lift or roll to clean
- Easy to clean with a high pressure hose

Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet .
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	Flexipath Covid-19 is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Fire	EN13501-1 : 2007 and classified - Cfl - SI
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Slip resistance	ASTM F 1677 - Dry/Wet: 1.0/0.8 DIN51130: RI I, V10 DIN51097: Classification C
Thermal	Designed to function at temperatures from -9°F and up to +140°F. Slight size variation may occur at temperature extremes
UV light	Resistant to PVC degradation. The red colour isn't colourfast in direct sunlight.
Warranty	One year. Visit our policies page for more information about warranties