



# Hose Reel



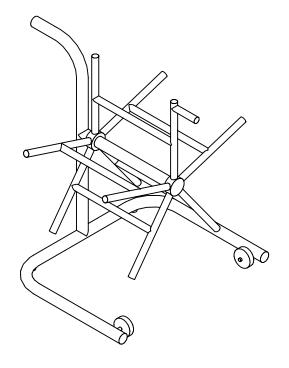

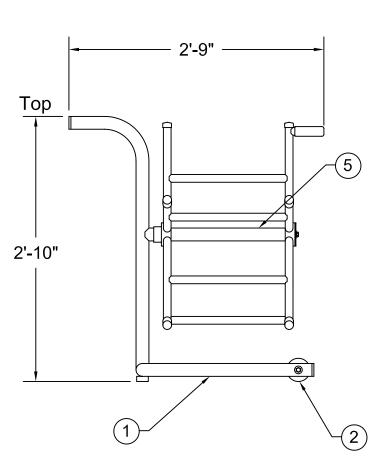

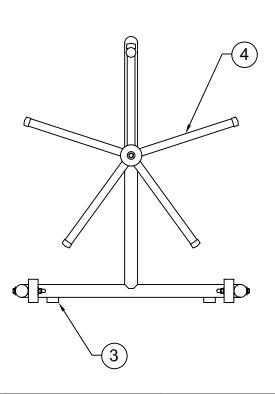

The data represents the latest knowledge available to us at time of presentation. However, Paragon Aquatics and others involved in gathering and presenting this drawing assume no liability for its use.

© 2008 Paragon Aquatics



Commerical Pool & Aquatics

1351 Route 55 LaGrangeville, New York 12540 Phone: 845-463-7200

Fax: 845-463-7291 www.paragonaquatics.com

by:	RV	Date:	6/27/08	Approved by:	JN	1M Date:	(	6/27/08
Sheet Title:	Hos	e Re	el					
Drawin	g S	S-PA	\40.03	Revision	В	Sheet:	1	of 2

## Hose Reel

Part Number: 75151

## **Specifications**

- 1 Base superstructure shall be made of 1.315" OD x .109 T304 stainless steel polished to a 320 grit satin finish. The superstructure is designed to fit through a standard door.
- (2) Two (2) 3" polyolefin wheels shall be provided for ease of movement.
- (3) Two (2) acetal plastic spacers are provided to protect hose reel and floor from damage.
- The spoked end assembly shall be made of 1.00" x .065" T304 Stainless Steel. Stainless steel machine bolts will secure assembly to the shaft. The hose reel holds up to 100 feet of 2" diameter hose.
- The main axle shall be made of 1.315" OD x .109 T304 Stainless Steel polished to a 320 grit satin finish. The main axle will ride on acetal plastic bushings enclosed in a stainless steel tube.

#### General

The stainless steel frame shall be electro-chemically passivated on all worked areas for maximum corrosion resistance. All hardware shall be 18-8 stainless steel. Custom designs and modifications are available upon request.

### Accessories

ID Number	Description			
75104	3" Polyolefin Wheel			

www.paragonaquatics.com

Drawing Number: SS-PA40.03

Drawn

Sheet

by:

RV

Revision Letter: B

Approved

6/27/08

Sheet: 2 of 2

6/27/08

JMM Date:

C 2008 Paragon Aquatics