


## 926-108/955-108

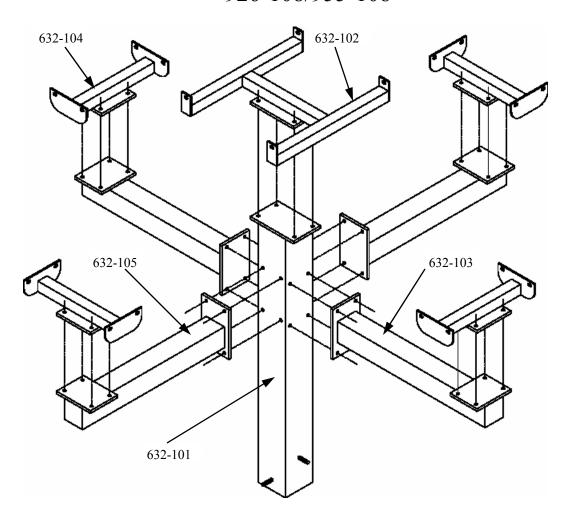

Part No.	Description	Qty.
642-111A/642-R11A	48" Champion Sq/Rnd Table Top WO/ Umbrella Hole	1
622-019/622-R11	40" Champion Seat	4
632-101	Center Pedestal Post	1
632-102	Table Top Support	1
632-103	Seat Arms	2
632-104	Seat Supports	4
632-105	Seat Arm for 4' Sq/Rd 1 Ped Tbl	2

The Table Top and Seats are not shown.

 $Periodic\ check\ of\ bolt\ tightness\ recommended.$ 





## 926-108 Single Pedestal Direct Bury Square Table

## 955-108 Single Pedestal Direct Bury Round Table

- 1 Bore a 12-14" diameter hole 36" into the ground.
- 2 Place 4-6" of pea rock in hole.
- 3 Place center pedestal post into the hole.
- 4 Drill out all holes with a 7/16" drill bit. Use a 1/2" drill bit for seat arm end plate holes and center pedestal post holes at their union.
- 5 Bolt the support arms on to the center pedestal post using 1/2"x9" stainless steel hex bolts.
- 6 Bolt seat supports on to the seat arms using 3/8"x2-1/2" stainless steel hex bolts.
- 7 Bolt table top support on to the center pedestal post using 3/8"x2-1/2" stainless steel hex bolts.
- 8 Bolt the table top on to the table top support using 3/8"x1-1/2" stainless steel hex bolts.
- 9 Bolt the seats on to the seat supports using 3/8"x1-1/2" stainless steel hex bolts.
- 10 Level table and adjust to desired height. Recommended height is 20" from the ground to the top of the seats.
- 11 Fill hole with concrete no higher than ground level.

In Accordance to California law: WARNING This product contains a chemical know to the State of California to cause cancer and birth defects or other reproductive harm.

